


## INTERCEL HF CHARGER / POWERSUPPLY

### DRA 1202-4

#### DERATING

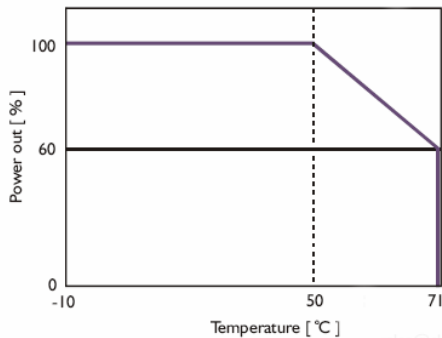

- AC/DC Power module
- Din-rail mountable
- Universal input 90~265VAC
- High efficiency up to 86%
- Class 2 output
- Short circuit protection
- Internal input filter
- 2 years warranty



Input voltage range	90 ~ 265 VAC
Auto range 90~265VAC	YES
Line frequency	50/60Hz
Output voltage	12 VDC nominal
Load curve	I * U
Float voltage	13,8 VDC
Ripple & Noise	< 50 mV
Power @ 25°C	60 Watt
Output current	2,5 A
Efficiency	86 %
Electronic Short circuit switch	YES
Case material	Plastic
Protection grade	IP 21
Dimensions (LxWxH)	90 x 40,5 x 115 ±1mm
Weight	0,4 kg.
Approvals and standards	UL1950, UL508 Listed, Class 2
	EN60950
	EN50081-1 /EN550022 class B for EMI
	EN50082-1 /EN55024 for EMS

\* User and battery are to be connected parallel.

\*\* Can be connected parallel on request.

[WWW.INTERCEL.NL](http://WWW.INTERCEL.NL)



InterCel Energie BV  
 Waarderveldweg 3  
 2031 BK Haarlem, The Netherlands

Tel +31 23 5149900  
 Fax +31 23 5322583  
 Email: [sales@intercel.nl](mailto:sales@intercel.nl)