


INTERCEL HF CHARGER / POWERSUPPLY

DRA 2402-4

DERATING

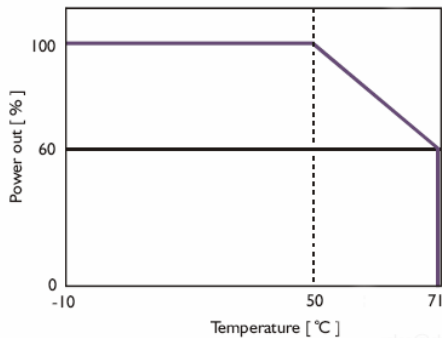

- AC/DC Power module
- Din-rail mountable
- Universal input 90~265VAC
- High efficiency up to 86%
- Class 2 output
- Short circuit protection
- Internal input filter
- 2 years warranty



Input voltage range	90 ~ 265 VAC
Auto range 90~265VAC	YES
Line frequency	50/60Hz
Output voltage	24 VDC nominal
Load curve	I * U
Float voltage	27,6 VDC
Ripple & Noise	< 50 mV
Power @ 25°C	60 Watt
Output current	2,5 A
Efficiency	86 %
Electronic Short circuit switch	YES
Case material	Plastic
Protection grade	IP 21
Dimensions (LxWxH)	90 x 40,5 x 115 ±1mm
Weight	0,4 kg.
Approvals and standards	UL1950, UL508 Listed, Class 2
	EN60950
	EN50081-1 /EN550022 class B for EMI
	EN50082-1 /EN55024 for EMS

* User and battery are to be connected parallel.

** Can be connected parallel on request.

WWW.INTERCEL.NL



InterCel Energie BV
 Waarderveldweg 3
 2031 BK Haarlem, The Netherlands

Tel +31 23 5149900
 Fax +31 23 5322583
 Email: sales@intercel.nl