


## INTERCEL HF CHARGER / POWERSUPPLY

### DRA 2410-4

#### DERATING

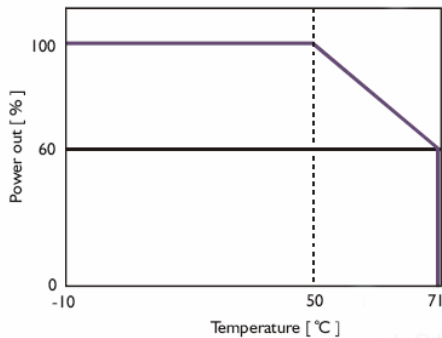

- AC/DC Power module
- Din-rail mountable
- Auto Range Input
- High efficiency up to 90%
- Compact Design
- Short circuit protection
- Internal input filter
- 2 years warranty



Input voltage range	90 ~ 265 VAC
Auto range 90~265VAC	Auto Range
Line frequency	50/60Hz
Output voltage	24 VDC nominal
Load curve	I * U
Float voltage	27,6 VDC
Ripple & Noise	< 50 mV
Power @ 25°C	240 Watt
Output current	10 A
Efficiency	Up to 90 %
Electronic Short circuit switch	YES
Case material	Metal
Protection grade	IP 21
Dimensions (LxWxH)	125 x 83 x 126 ±1mm
Weight	1,0 kg.
Approvals and standards	UL508 Listed
	EN60950
	EN61000-6-2 /EN61000-6-3
	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11

\* User and battery are to be connected parallel.

\*\* Can be connected parallel on request.

[WWW.INTERCEL.NL](http://WWW.INTERCEL.NL)



InterCel Energie BV  
 Waarderveldweg 3  
 2031 BK Haarlem, The Netherlands

Tel +31 23 5149900  
 Fax +31 23 5322583  
 Email: [sales@intercel.nl](mailto:sales@intercel.nl)