




LEAD ACID BATTERIES FOR MULTI PURPOSE USE

NP 1,2-6

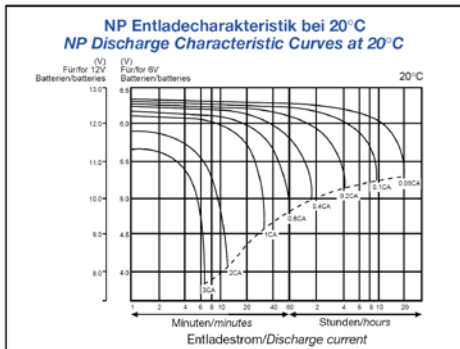

- Valve Regulated Maintenance Free
- High current drain grid being resistant to corrosion by virtue of a lead-calcium alloy
- Absorbing Glassmatt Technology (AGM)
- Classified as non-spillable and Non Dangerous goods by IATA



Nominal Voltage	6 V DC
Nominal Capacity:	
20hr. rate of 0.5A TO 10.5V	1.2Ah
3hr. rate of 2.5A TO 10.2V	0.9Ah
1hr. rate of 6.0A TO 9.6V	0.72Ah
Internal resistance	147mΩ
Max. charge current	0,25CA (0.3A)
Max. discharge current	8,4A
Operation temperature range	
Charge	-15 degr. ~ 40 degr.
Discharge	-15 degr. ~ 50 degr.
Storage temperature	-15 degr. ~ 40 degr.
Fast Charge / Floating charge	14,8V / 13,65 V (±0,15 V)
Expected life (25 degr.)	3-5 years in float charging
Standard terminal	Faston Tab 187
Housing material	ABS (Acrylonitirbutadienstyren)
Dimensions (LxWxH)	97 x 25 x 51 (54.5mm.) ±1mm
Weight	0,34kg.
Can be operated, charged or stored in any position without leakage.	
Can not be charged while the terminal is downward.	

WWW.INTERCEL.NL



Intercel Energie BV
 Waarderveldweg 3
 2031 BK Haarlem, The Netherlands

Tel +31 23 5149900
 Fax +31 23 5322583
 Email: sales@intercel.nl